

UltraPatch™ Patch Booster


UltraPatch™ patch booster is an additive that significantly improves the application, appearance and longevity of gelcoat patches. Not a conventional thinner or solvent, it offers:

- Faster cure
- Harder Patch
- Superior gloss
- Less halo
- Longer-term durability
- 90 Day Shelf-life

UltraPatch patch booster also eliminates the need to thin, side-promote, or add wax to gelcoat prior to patching.

APPLICATION GUIDELINES

1. Mix patch booster thoroughly.
2. The recommended ratio mix is 25% patch booster to 75% gelcoat. To this mix add 1.5% to 2.0% MEKP. Mix and spray.
3. The acceptable method for measuring small quantities of MEKP is with a syringe.
4. Even a thin sprayed layer will be ready to sand in approximately one hour and hard enough to buff soon thereafter.
5. Care must be taken not to over or under catalyze, which may affect color.
6. Working time is approximately 5 minutes.

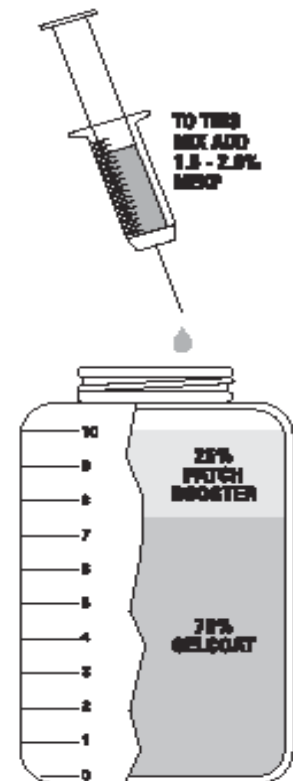

GELCOATS FOR REINFORCED PROCESSING

FERRO CORPORATION
Liquid Coatings
and Dispersions Division

1301 North Flora Street
Plymouth, IN 46563-1395
Tel: 574-935-5131
Fax: 574-935-5278

54 Kellogg Court
Edison, NJ 08817-2509
Tel: 732-287-1930
Fax: 732-287-8966

